## RECYCLING SCREEN SBR 3









direct excitation



simple screen tension





poles separator for pre-separation

# Robust technology for the highest economic efficiency

Developed for use in road construction and civil engineering, optimized for wheel loader with approx. 1 m<sup>3</sup> bucket capacity


#### For the processing of:

- excavation mixture
- topsoil
- construction rubble
- gravel, grit and sands
- asphalt milled material
- slags, metal scrap, ...

Saves costs for logistics, disposal and crushing in mobile and stationary use on construction sites, recycling centers and gravel pits

#### Your advantages:

- great power combined with a long screen track for quick loading and difficult to screen materials
- electrical operation for low operating costs and emissions
- high mass throughput: approx. 60-100 t/h
- simple screen change: <30 minutes</p>
- easy height and tilt adjustment to adapt to wheel loader and material
- lowest sound emissions: 99 dB

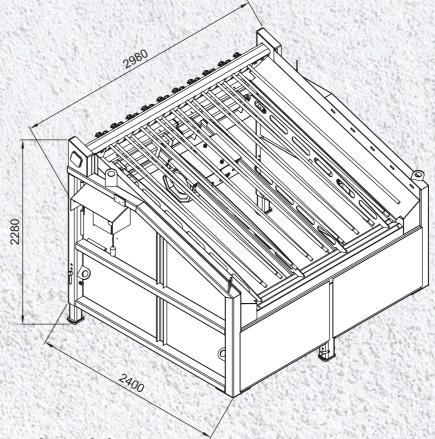

#### technical data

transport width 2,980 mm dimensions: depth 2,400 mm height 2,280 mm

screen track: length 2,400 mm width 2,000 mm


entry height: approx. 2,200 to 3,000 mm

total weight: approx. 2.3 tons

driving power: 2 kW

power connection: 16 A CEE / 400 V





quick start manual



control cabinet with operating hours counter



simple height and tilt adjustment



stable 3-leg construction













### videos on www.einfach-aufbereiten.de

EAG Einfach Aufbereiten GmbH Karl-Marx-Straße 11 · 01109 Dresden +49 (0) 351 - 884 57 40 einfach-aufbereiten@bhs-dresden.de



