RECYCLING SCREEN SBR 4



EINFACH

AUFBEREIT

Semimobil





www.einfach-aufbereiten.de






simple screen tension



optimized vibration damping



poles separator for pre-separation



Robust technology for the highest economic efficiency

Developed for use in asphalt mixing plants, recycling and extraction companies, as well as on construction sites, optimized for loading by wheel loader with approx. 4 m³ bucket capacity


For the processing of:

- asphalt milled material
- construction rubble
- excavation mixture
- topsoil, humus
- gravel, grit and sands
- slags, metal scrap, etc.

Reduces operating, logistics, disposal and crushing costs in mobile and stationary use

Your advantages:

- great power combined with a long screen track for quick loading and small separating cuts
- electrical operation for low operating costs and emissions
- automatic ON-OFF for flexible operation
- high mass throughput: approx. 140 t /h
- flexible use due to simple screen change: < 60 minutes
- easy height and tilt adjustment to adapt to wheel loader and material
- Iow noise emissions: Lwa 103 dB

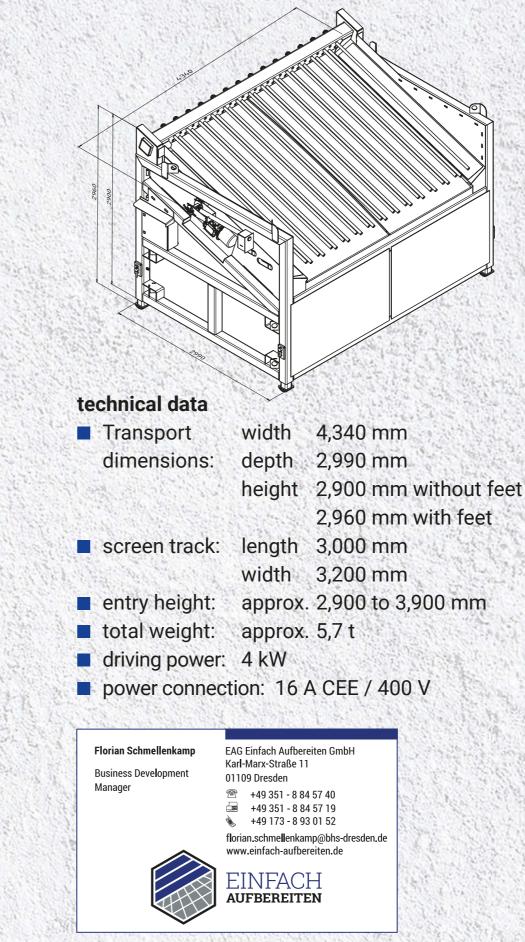







automatic sensor



control cabinet with quick start manual



simple height and tilt adjustment



loadable by wheel loader







Prepare humus at any time - SBR 4 with sensor control at the recycling site

videos on www.einfach-aufbereiten.de



